

ATE




Q-TEK 521-1A

Q-TEK

Q-TEK

Q-TEK
SADDLE FUSION
MACHINES

THE Q-TEK MODEL 432 SADDLE FUSION MACHINE

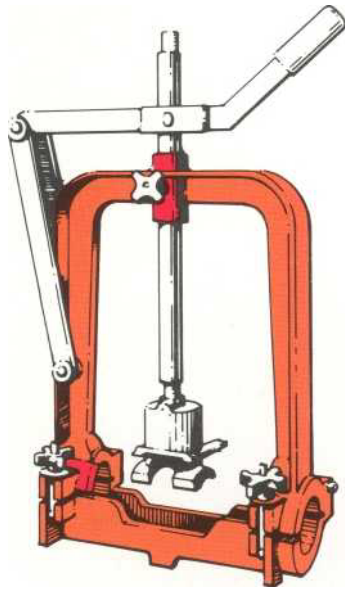

Simple, easy to use and versatile, Q-TEK Saddle Fusion Machines give precise alignment every time. Gone forever are shims, spacers, chains and complicated head changes the other machines require.

The Q-TEK machine can be used with all popular pipe and tee sizes. Simply change the liners and the Model #432 will accommodate 1/2" to 4" pipe. To fuse standard tees, branch saddles, or high-volume tees, simply change the holder. Q-TEK holders and liners are interchangeable with liners and holders manufactured by others.

Durable, yet lightweight, these machines will last through years of rugged use. Model #432 weighs only 23 pounds. Designed for years of rust-free service, too, the durable cast aluminum frame has a baked epoxy enamel finish and all steel parts are plated or painted for protection.

Clamp a Q-TEK machine on a pipe and you're ready to make a fusion without making any adjustments. The alignment is always precise and the pressure is always accurate. The results are consistently good fusions with uniform melt patterns and good beads around the fitting. Count on the American made Q-TEK machines to do your job everytime!

Heating iron repairs and re-coating services are available. These services are prompt and affordable because parts for all irons are stocked. Parts are also available if you prefer to rebuild irons in-house.

Requests for user information and prompt quotes-by-phone are always welcome. For the best value and service in plastic pipe tools call Q-TEK!

TAPPING TEE HOLDERS

#250	Plexco/Central/Phillips (2' "OD Cap)
#251	Dupont
#252	Continental
#253	Rahn
#255	Phillips Drisco

HIGH-VOLUME TEE HOLDERS

#HV250	Plexco/Central
#HV251	Dupont
#HV255	Phillips Drisco

Holders are available for Branch saddles and Multi-saddles (sizes must accompany order)

LINERS

From - 2" IPS OD to 1 1/4"	IPS OD
From - 2" IPS OD to 1• "	IPS OD
From - 3" IPS OD to 2"	IPS OD
From - 4" IPS OD to 3"	IPS OD
From - 6" IPS OD to 4"	IPS OD
From - 8" IPS OD to 6"	IPS OD